




ARRANGEMENT -3

API STANDARD 682, 4th EDITION MECHANICAL SEAL CONFIGURATION 3CW-BB, LIQUID BARRIER FLUID

SUPER SEAL TYPE.- SA 3290 BB

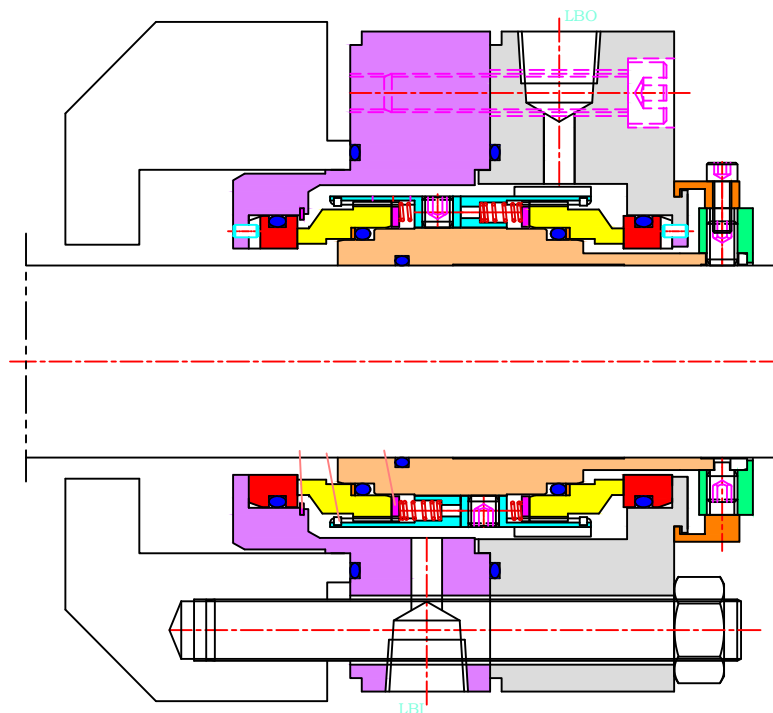

Shaft Size : 20 to 120 mm.

Pressure : Vacuum to 40 Kg/cm²

Temp : -40° to 200°C

TWO SEALS PER CARTRIDGE ASSEMBLY THAT UTILIZE AN EXTERNALLY SUPPLIED BARRIER FLUID

CONTACTING WET SEALS IN A BACK TO BACK CONFIGURATION.

*Think safety * Think super*